



F-Theta JENar™ Silverline™ Lens
High Power Lens – JENar™ 510-355-431

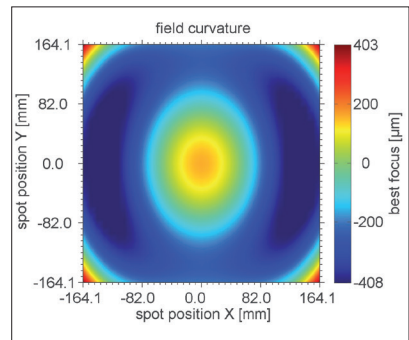


| Parameters | JENar™ 510-355-431 Fused silica lens for large scan fields |
|---|---|
| Focal length: | 510 mm |
| Wavelength: | 355 nm |
| Scan field (X x Y); Ø: | (328 mm x 328 mm); 431 mm |
| Diagonal scan angle: | ± 25.7° |
| X/Y mirror angle: | ± 9.2° |
| Back working distance: | 609 mm |
| Flange focus distance: | 637 mm |
| Input beam Ø 1/e ² : | 14 mm |
| Focus size Ø 1/e ² : | 24 µm |
| a1 a2: | 14 mm 42 mm |
| Telecentricity (only F-Theta with scanner): | 18.2° 18.2° |
| Group delay dispersion (GDD)*: | 5260 fs ² |
| LIDT coating pulsed; CW*: | 1.0 J/cm ² * (τ/[ns]) ^ 0.40; 1.0 MW/cm ² |
| LIDT system pulsed; CW*: | 1.0 J/cm ² * (τ/[ns]) ^ 0.40; 1.0 MW/cm ² |
| Weight: | 0.70 kg |
| Order Number: | 017700-405-26 |


Spot properties

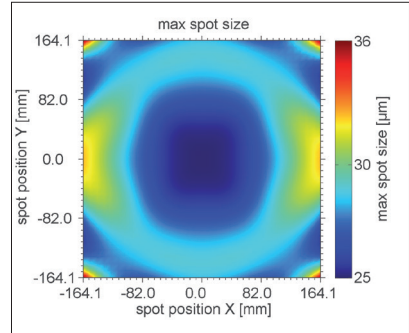

Specifications
JENar™ 510-355-431

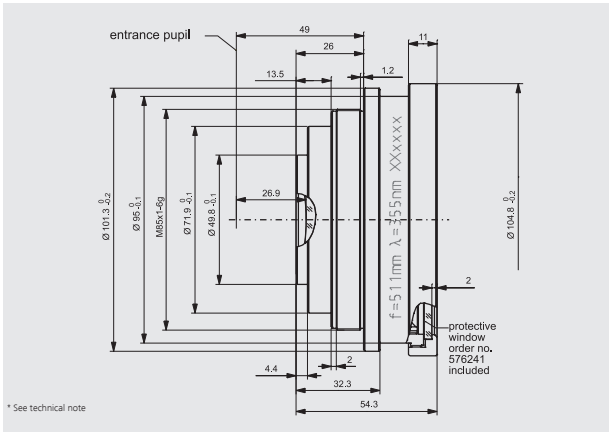

Definition of geometrical parameters

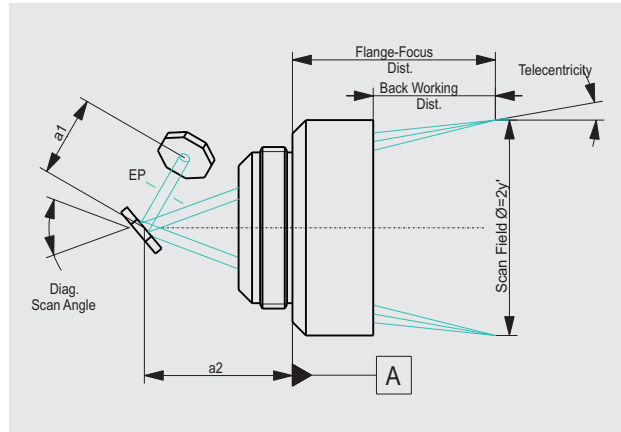

JENar®: Registered in EU, CN, JP, SG, US | Silverline®: Registered in DE, JP, SG, IN

The data given are nominal values for the specified application parameters. Jenoptik provides Zemax® BlackBox files for simulating application results for customized parameters (e.g. wavelength, scanner geometry, beam diameter, ...).
Back working distance, Flange focus distance, and focal length vary by ± 1.5 % due to manufacturing variances.

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.